


SUZUKI

ES-8600

15 INCH COLOR TFT LCD

DIGITAL SIGNAL PROCESSING TECHNOLOGY

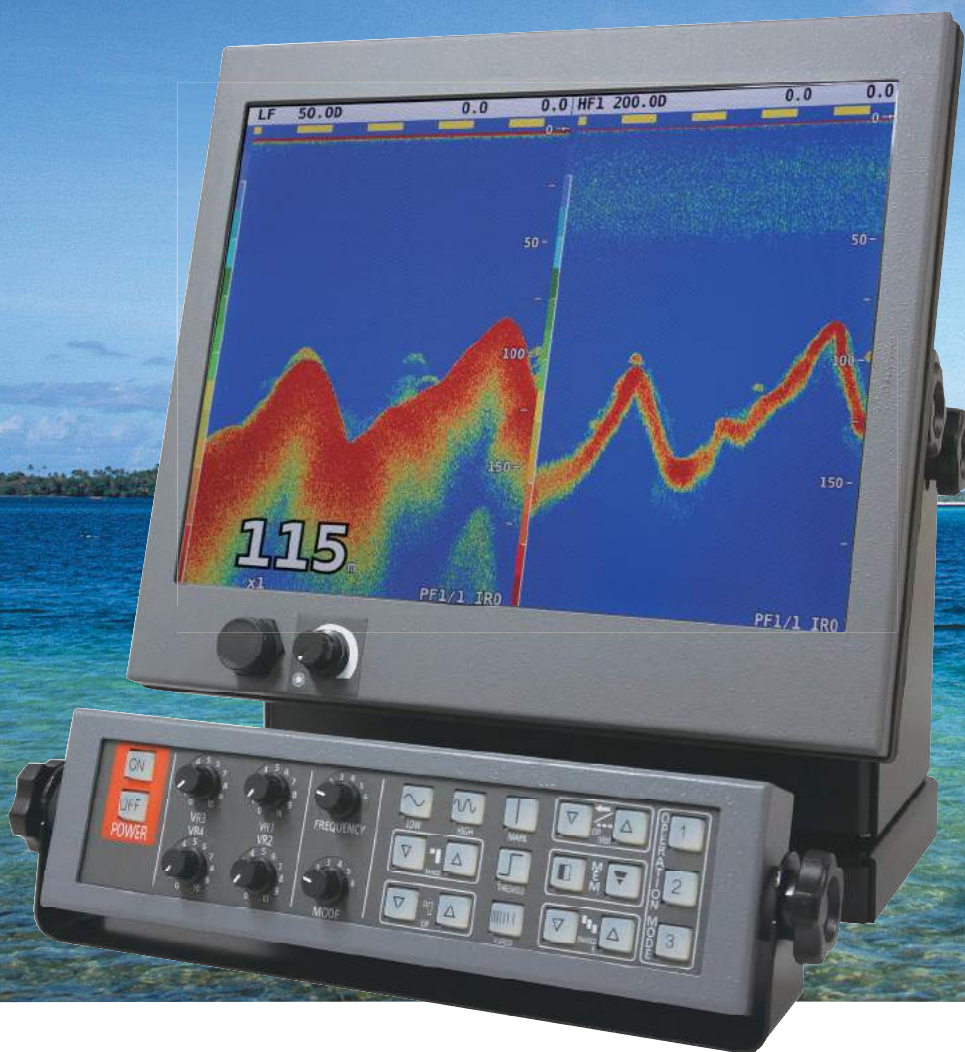

FEATURES

SUZUKI FLEX. FREQUENCY SYSTEM (FFS)

FFS permits an ideal operating frequency you need.

15 INCH COLOR THIN FILM TRANSISTOR LIQUID CRYSTAL DISPLAY

High brightness, resolution (1024 x 768 pixels) LCD panel provides sharp echo image on the screen.

DIGITAL SIGNAL PROCESSING TECHNOLOGY


The DSP technology brings outstanding performance in 16 colors.

SCREENSHOT

12 screenshots can be stored on the unit.

SPECIFICATIONS

■ Basic Ranges	Free Range (10 kinds of range settings up to 3000m, br, fm or 6000ft)
■ Shift	Up to 1999m, br. fm. or 2999ft
■ Part Expansion	Free Range (8 kinds of range settings up to 1000m, br, fm or 3000ft)
■ Frequencies	Dual-frequency (20, 24, 28, 38, 40, 45, 50, 60, 68, 70, 80, 150, 200kHz, TRI-TR Boards Can Be Mounted)
■ Display Mode	1. Single Low Frequency 2. Single High Frequency 3. Dual Frequency (Vertical or Horizontal) 4. Bottom Expansion/Sounder 5. Partial Expansion/Sounder 6. Navigation Mode/Sounder 7. Range set Menu 8. Functions set Menu 9. Color Palette Set Menu 10. A-Scope/Sounder
■ Digital Display	1. Depth 2. Depth Scale 3. Shift 4. Expansion Start/VRM 5. Timer 6. Water Temperature, Graph* 7. Lat / Lon* 8. Speed* 9. Course* 10. Voltage
■ Other Functions	Operation Mode, Frequency Selection, Far Gain Control, Gain Control, TVG Curve, D-Range, Transmit. Interval Change, Pulse Width Change (Auto/Manual), Color Selection, Interference Reduction, Jamming Reduction, Noise Reduction, Clutter Control, Water Temp. Adjustment, White Line, Picture Filter, Screenshot, Outer Range Display, Draft Adjustment, Output Power Reduction, Stopwatch, Various Alarms, Scale Change, Brightness Control, Picture Speed (Auto/Fix), Sonic control, Full-screen Gain Control
■ External Input	Water Temperature Sensor (OP-102, OP-41, NMEA-0183 <MTW>), Navigational Data (NMEA-0183), External Sounder, Compass (NMEA-0183)
■ External Output	Depth Data (NMEA-0183), Water Temperature Data (NMEA-0183), Marker (TLL), External Sounder, Analog RGB Output*, External Buzzer
■ Others	USB Memory
■ Screen	15inch TFT Color LCD Monitor 1024x768 Pixels Display Resolution (XGA), 8/16 colors
■ Power Requirement	DC 20 – 30V, Power Consumption 60W *Optional equipment is required.

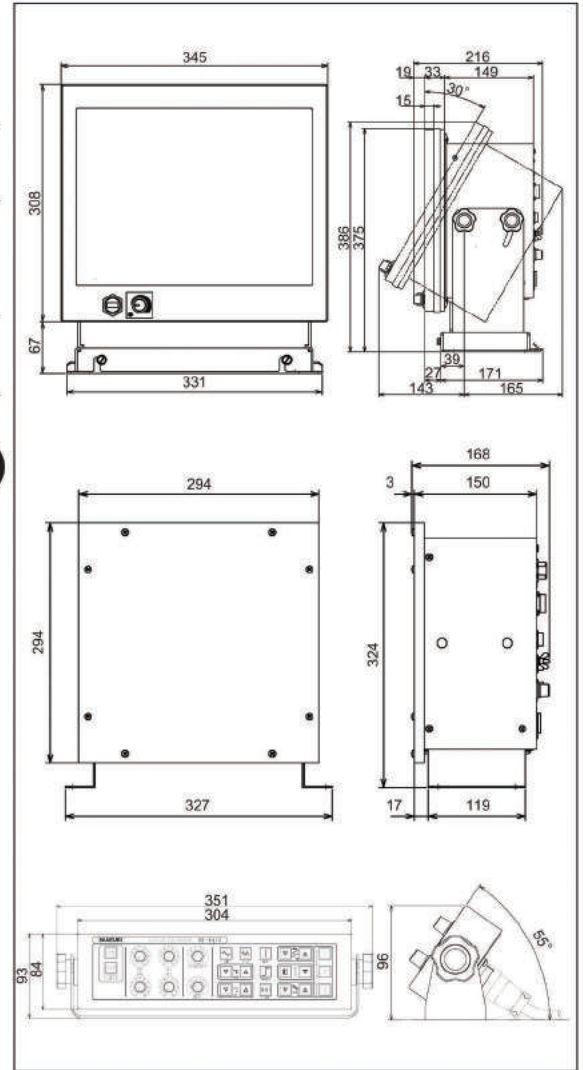

If you would like to know more about our products please contact...

SUZUKI FISH FINDER CO., LTD.

Head Office 12-1, Mamizuka-cho, Toyohashi-city, Aichi-pref,
441-8007 Japan
Phone(81)532-32-7511 Fax(81)532-32-7500
e-mail address : sales@suzukiff.co.jp
URL: <http://www.suzukiff.co.jp/>

© Colors used in this catalogue are subject to differ from actual colors.



**TORKAR
MARİN**
Elektronik Servis ve Ticaret A.Ş.

Ortaklar Cad. Nur Apt. No.:11 D:3
34394 Mecidiyeköy - İSTANBUL
Tel.: 90(212) 217 97 47-217 97 48
Fax.:90(212) 217 97 45
e-mail: torkarmarin@dposta.net
Web : www.torkarmarin.com